

MODELS:

ATMG-24T / ATMG-36T / ATMG-48T

Thermostatic Griddle

Standard Features

- Stainless steel exterior & interior
- Stainless steel grease drawer
- Heavy duty 3/4" thick polished steel griddle plate (converting to 1" plate 9/1/19)
- 25,000 BTU burners per 12" section with standby pilots
- Independent manual controls for each 12" section
- Stainless steel legs standard
- 3/4" NPT rear gas connection and regulator standard


ATMG-24T



ATMG-36T



ATMG-48T

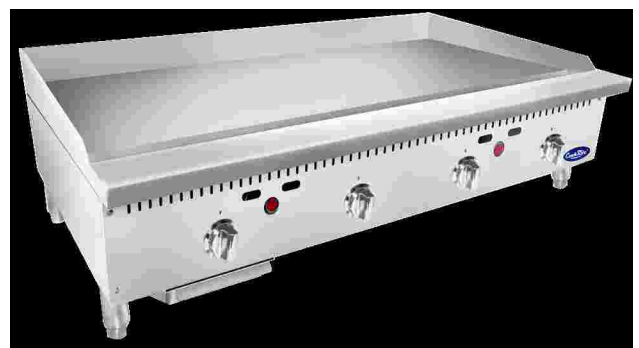

1 YR WARRANTY ON ALL PARTS AND LABOR (US ONLY)





Conforms to ANSI
STD Z83.11-2009 (2011)
Certified to CSA
STD 1.8B-2009 (2011)
Conforms to NSF/ANSI STD.4



SPECIFICATIONS

Models	Burners and control method	Gas type	Intake-tube presssure (in.W.C.)	Per BTU B.T.U./h	Total BTU B.T.U./h	Regulator	Work area (inch)	Net weight (lbs)	Gross weight (lbs)
ATMG-24T	2 Burners Independent Manual Control	NG	4	25,000	50,000	4" w.c.	23 ^{9/10} × 19 ^{9/10}	160.9	194.5
		LP	10	25,000	50,000	10" w.c.			
ATMG-36T	3 Burners Independent Manual Control	NG	4	25,000	75,000	4" w.c.	35 ^{7/10} × 19 ^{9/10}	229	280.9
		LP	10	25,000	75,000	10" w.c.			
ATMG-48T	4 Burners Independent Manual Control	NG	4	25,000	100,000	4" w.c.	47 ^{9/10} × 19 ^{9/10}	294	414
		LP	10	25,000	100,000	10" w.c.			

PLAN VIEW

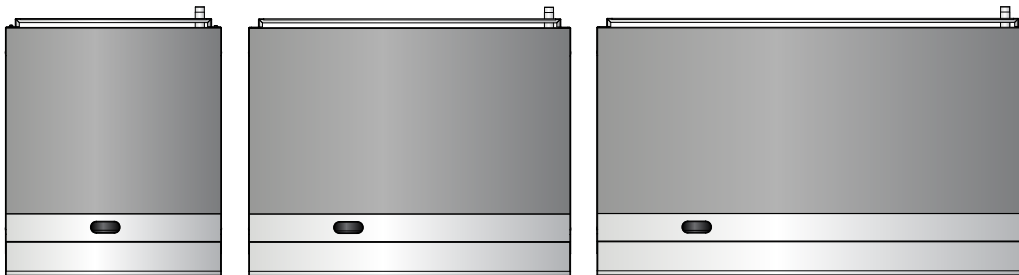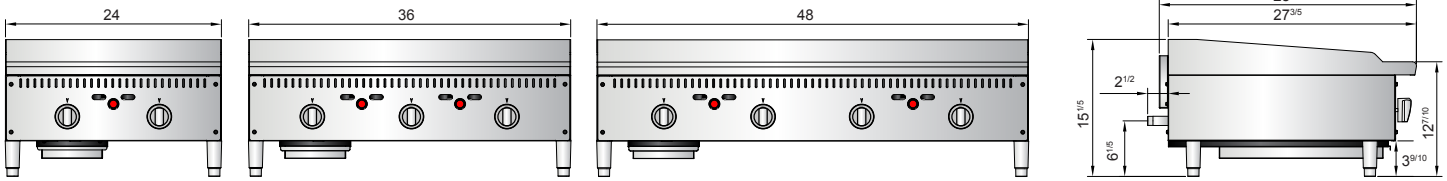

ATMG-24T

ATMG-36T

ATMG-48T

